BRUHAT BANGALORE MAHANAGARA PALIKE
DASARAHALLI ZONE

Name of Work: Improvements and Asphalting 5th, 6th, 7th & 8th Cross (between 7th main & 8th main) Bhuvaneshwarinagara in Bagalagunte Ward No.14, T.Dasarahalli Sub Division.

							Est. Cost Rs.	20.00	Lakhs
Sl	Description of Item	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRRB 300 - Excavation for road, drains and similar works - KSRRB 300-1. Earthwork excavation by manual means in **Ordinary soil** involving an average horizontal throw upto 2 meters and an average lift upto 0.5 m, excavated surface leveled and sides neatly dressed, the disposed earth to be leveled neatly after breaking of clods complete as per specifications complete as per specifications. MORTH Chapter 3 (P.142/I.19.1 PW, P & IWTD -SR 2016-17)								
	5, 6, 7 & 8 Cross	Cum	1	518.00	2.00	0.30	310.80		
	Basic Rate	82.00					310.80	86.92	27015.00
	Add Area Weightage 6%	4.92							
	Total	**86.92**							
2	KSRRB M400-1 For Grading I material construction of **granular sub-base** by providing coarse graded crushed stone aggregates of Granite/ trap/basalt material spreading in uniform layers with motir grader on prepared surface mixing by a mix in place method with rotawater at OMC, and Compacting with vibratory roller to achieve the desired density, complete as per specifications.by mix in a Place method for course Graded Granular Sub Base Material as per 400-2 for grading I material .Page No 155/ Item No. 20.6.1 PWD SR 2016-17								
	5, 6, 7 & 8 Cross	Cum	1	518.00	2.00	0.10	103.60		
	Basic Rate	1433.00					103.60	1518.98	157366.00
	Add Area Weightage 6%	85.98							
	TOTAL	**1518.98**							
3	Providing, laying, spreading and compacting graded stone aggregates to **wet mix macadam** specifications including pre mixing the material with water at OMC in mechanical mix plant carriage of mixed method of tipper to site, laying in uniform layers with paver in sub-base / base course on well prepared surface and compacting with vibratory roller to achieve the desired density complete as per specifications. Specification No. 406 with all leads and lifts etc., complete as per the direction of Engineer-in-charge of the work.(PWD SR 2016-17, P.No.158 I No.20.18)								

Sl	Description of Item	Unit	No	L	B	D	Qty	Rate	Amount
	5, 6, 7 & 8 Cross	Cum.	1	518.00	2.00	0.23	238.28		
	Basic Rate	1668.00					238.28	1768.08	421298.00
	Add Area Weightage 6%	100.08							
	Total	**1768.08**							
4	Providing and applying **primer coat** with S.S. Bitumen emulsion on prepared surface of granular base such as WBM, WMM including clearing of road surface and spraying primer at the rate of 0.6 kg / sqm using mechanical means complete as per specifications, with all leads and lifts etc., complete as per the direction of Engineer-in-charge of the work.(PWDSR 2016-17, P.No.161, I No.21.6)								
	5, 6, 7 & 8 Cross	Sqm	1	518.00	2.00		1036.00		
							1036.00	27.56	28552.00
	Basic Rate	26.00							
	Add Area Weightage 6%	1.56							
	Total	**27.56**							
5	KSRRB 500-2: Cleaning the existing **black topped surface** with brooms, soft brushes and finally dusting with old gunny bags and/or compressed air to receive bituminous treatment including cost of all materials, labour, HOM of machineries complete as per specifications. Specification No. KRBS 500-1 MORTH Chapter 5 **Page No. 161/ Item No. 21.2/ PWD SR 2016-17**								
	5, 6, 7 & 8 Cross	**Sqm**	1	518.00	4.00		2072.00		
	Basic Rate	3.00					2072.00	3.18	6589.00
	Add Area Weightage 6%	0.18							
	Total	**3.18**							
6	KSRRB 500-7: Providing and applying **tack coat on the prepared black topped** surfaces at 5kg per 10 sqm, heating bitumen in boiler fitted with spray set (Excluding cleaning of road surface) including cost of all Materials, labour, HOM of machineries complete as per specifications. MORTH Chapter 5 Page No. 161/ Item No. 21.7/ PWD SR 2016-17								
	5, 6, 7 & 8 Cross	**Sqm**	1	518.00	4.00		2072.00		
							2072.00	11.66	24160.00
	Basic Rate	11.00							
	Add Area Weightage 6%	0.66							
	Total	**11.66**							

Sl	Description of Item	Unit	No	L	B	D	Qty	Rate	Amount
7	Providing and laying **bituminous macadam** on prepared surface with crushed coarse aggregates as per design mix formula for base / binding course including loading of aggregates with F.E. loader, hot mixing of stone aggregates and bitumen in hot mix plant 40 tonne capacity, transporting the mixed material in tipper to paver and laying mixed materials with paver finisher to the required level and grade, rolling by power roller to achieve the desired density, 50/75mm compacted thickness with 3.3% bitumen but excluding the cost of primer/tack coat with lead incl. cost of all materials, labour, HOM of machineries complete as per specifications with 80/100 grade bitumen using 40/60TPH capacity H.M.P with Mechanical paver Gr II (50/75mm) with 3.3% VG-30 Bitumen as per the directions of Engineer-in-charge of the work(PWDSR 2016-17, P.No.161, I No.21.11.6)								
	5, 6, 7 & 8 Cross	Cum	1	518.00	2.00	0.05	51.80		
	Basic Rate	4941.00					51.80	5237.46	271300.00
	Add Area Weightage 6%	296.46							
	Total	5237.46							
8	Providing and laying **bituminous concrete** with hot mix plant using crushed aggregates of specified grading, premixed with bituminous binder and filter transporting the hot mix to work site laying with paver finisher to the required grade, level and alignment. rolling with smooth wheeled vibratory and tandem rollers to achieve the desired compaction as per MORTH Speicification clause no 500.9 complete in all respects complete as per specification no 509. using 40/60 TPH Capacity H.M.P With Mechanical paver Gr-II (30 mm to 45 mm) with 6% VG-30 Bitumen(p-164, lt 21.22.6) PWD SR 2016-17								
	5, 6, 7 & 8 Cross	Cum	1	518.00	6.00	0.045	139.86		
	Basic Rate	6859.00					139.86	7270.54	1016858.00
	Add Area Weightage 6%	411.54							
	Total	7270.54							

Sl	Description of Item	Unit	No	L	B	D	Qty	Rate	Amount
9	Disposal of debris to the final place of disposal with all lead and lift and as direction by the engineer in charge of the work, lead 4 Km a) Basic rate for haulage of materials as per item No. 17.4/KSRRB : M100-4.1 ..... Rs. 2.00 Tonne/Km b) Average earth of work 1.28 Tonne/Km for Rs. 2.00/Km c) Add loading and unloading Page No. 133 Item No. 17.1 PWD SR 2016-17								
		Cum	Qty Vide Item No. 1				310.80	~~85.65~~	~~26619.00~~
	Loading and	68.00						80.80	25113.60
	Lead 4 KMs	12.80	(2.8x1.28x4)						
		80.80							
	~~Add Area Weightage 6%~~	~~4.85~~							
	Total	~~85.65~~							
10	Quality control Test Charges 1%								20000.00
									1749.60
11	Miscellaneous and Unforessen Charges								~~243.00~~
								Total	2000000.00
	(Rupees Twenty Lakhs Only)								

CERTIFICATE:-

1. The Work spot has been inspected and the work is found to be necessary
2. The Estimate is prepared as per the PW,P & IWTD -SR-2016-17
3. The Provision made in estimate are adequate and essential.
4. This area comes under BBMP limits.

Assistant Engineer
Bagalagunte Ward 14

Assistant Executive Engineer
T. Dasarahalli Sub-Division
B.B.M.P

Executive Engineer
Dasarahalli Division
B.B.M.P. Bangalore.

ನಂ. CE/D2/AS/55/16-17 ದಿನಾಂಕ: 09/01/2017
ರೂ. ಇಪ್ಪತ್ತು ಲಕ್ಷಗಳು/- 20.00 lakhs
Rs. Twenty Lakhs only/- ಗಳ
ಅಂದಾಜು ಪಟ್ಟಿಗೆ ಆಡಳಿತಾತ್ಮಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ.
ಮುಖ್ಯ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ.
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು.

ನಂ. EE/DD/TS/84/16-17 ದಿನಾಂಕ: 10.01.17
ರೂ. Twenty lakhs only
ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ... ಮಂಜೂರಾತಿ ನೀಡಿದೆ
... ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ದಾಸರಹಳ್ಳಿ ವಲಯ
ಬೆಂಗಳೂರು ನಗರ, ಬೆಂಗಳೂರು

Name of work:- Improvements & Asphalting 5th, 6th, 7th & 8th Cross (Between 7th main & 8th main) Bhuvaneshwari Nagara in Bagalagunte W.No.14.

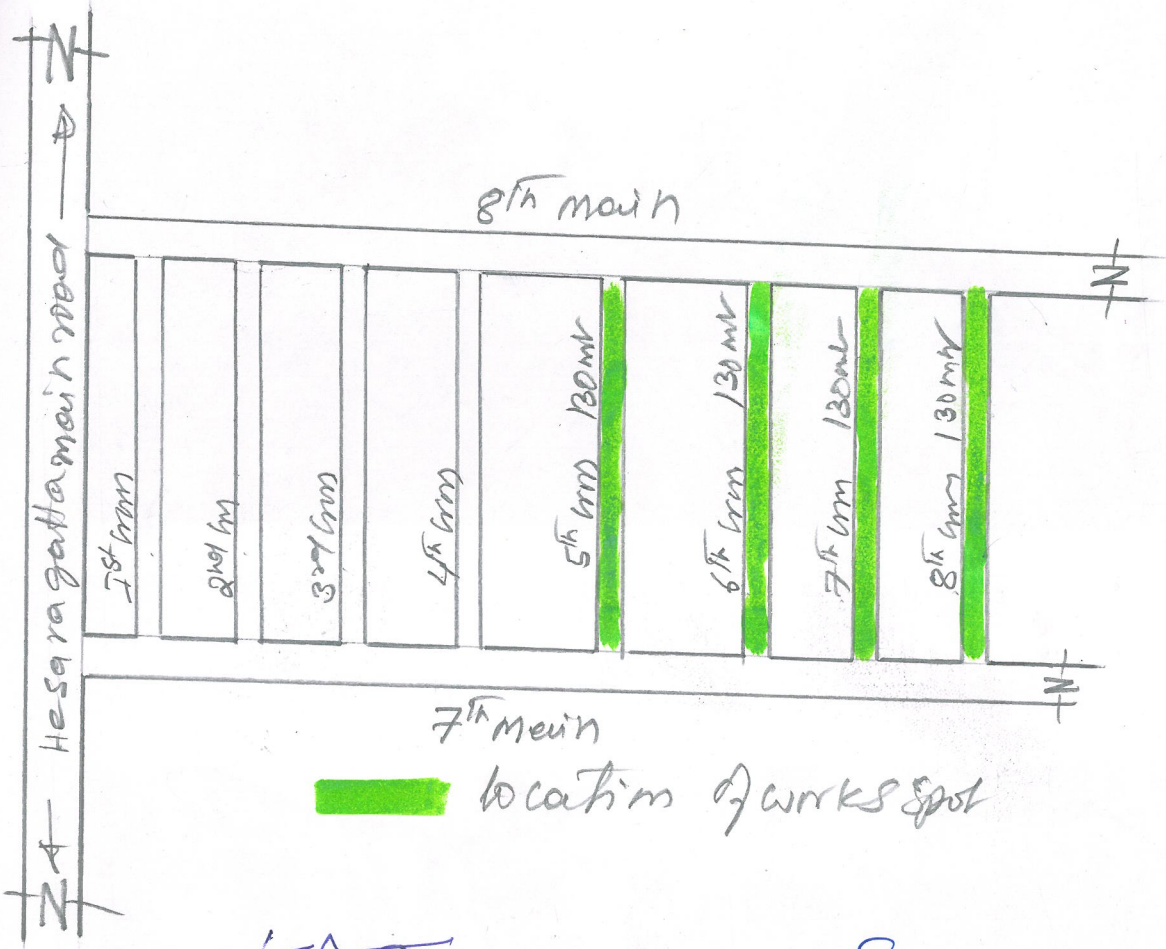

25

ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ. ಪಶ್ಚಿಮ-ವಿಭಾಗ
ಮಲ್ಲೇಶ್ವರಂ, ಬೆಂಗಳೂರು
ಬೆಂಗಳೂರು